

GRAVITY STICK PLUS

GLOBALFLOR® GRAVITY STICK PLUS is a kind of peel and stick product, but it is different from other products in the market. The flooring is not only for use in residential areas, but also for commercial and industrial use, public areas such as hospital offices, sports facilities, schools and supermarkets. In addition to standard use in residential and commercial areas, the product can be removed and re-positioned several times. For this reason, it is suitable for raised floors and platforms in a show. Even after years of use, the floor can be repositioned for new use. Treating the flooring surface with a dual-PUR reinforcement not only improves the excellent wear-resistance performance but also helps reduce bacteria and the passage of infection. This helps promote a fresh healthy environment.

GRAVITY STICK PLUS^[1]

DESCRIPTION^[2]

Total thickness	EN 428	mm	4
Wear Layer	EN 429	mm	0.3
Weight	EN 430	m	7550
Size	-	-	7.25"*48"

CLASSIFICATION


European classification	EN 685	Class	23/34/43
Fire rating	EN 13501-1:2007	Class	B _{fl} -s1
Slip resistance	DIN 51130	Class	R10

PERFORMANCE

Wear resistance	ISO 24388-A	Cycles	>4000
Color fastness	ISO 105 B02	Class	≥6
Dimension stability (80°C, 6h)	EN 434	%	≤0.02
Flexibility (10mm mandrel)	EN 435	-	No damage
Residual indentation after static load	EN 433	mm	Mean value 0.01
Peeling strength of layers	EN 421	-	Pass
Shear forces of layers	EN 432	-	Good
Chemical resistance	EN 423	Class	0
Toxic	EN 7103	-	ND
Castor chair test	EN 425	-	No disturbance

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000	µg/m ³	<10
Formaldehyde Emission	EN 14041	Class	E1

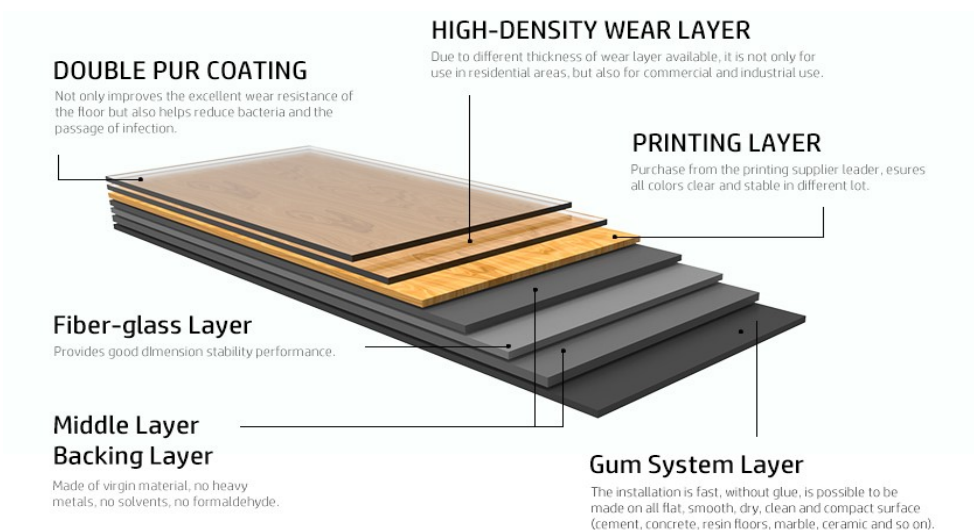

[1] Globalflor has a policy of continuous product and product data improvement, it reserves the right to change design and specifications without notice. For the latest TDS, please kindly check www.bomeiflor.com

GLOBALFLOR
Powered By
BOMEIFLOR