

NATURE 1.6T

A comfortable solution for smooth and safe daily light commercial or home use.

NATURE 1.6T^[1]

DESCRIPTION

Total thickness	EN 428	mm	1.6
Wear layer thickness	EN 429	mm	0.08
Width	EN 426	m	2
Length	EN 427	m	20
Weight	EN 430	g/m ²	2300

CLASSIFICATION

European classification	EN 685	Class	23/32
Fire rating	EN 13501-1:2007	Class	B _{fl} -s1
Static electrical propensity	EN 1815	kV	<2
Slip resistance	DIN 51130	Class	R9

PERFORMANCE

Dimension stability	EN 434:1994	%	≤0.1
Castor chair test	EN 425	-	OK
Flexibility	EN 435	-	Excellent
Residual indentation	EN 433	mm	≤0.1
Color fastness	EN ISO 105-B02	Degree	≥6
Stain resistance	EN 423	-	Good
Hygiene	-	-	Does not contribute to infection spreading
Impact sound reduction	EN ISO 717/2	dB	Approx.4
Backing type	-	-	Compact
Surface treatment	-	-	UV

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000	µg/m ³	<10
Formaldehyde Emission	EN 14041	Class	E1
PCP	EN 14041	-	ND


CUSTOMIZABLE HEALTECH™ TREATMENT

Antimicrobial Activity ^[2]	ASTM G 21-13	Grade	0
Antimicrobial Activity ^[3]	ASTM E 2180-07	%	>99.9

[1] Globalflor has a policy of continuous product and product data improvement, it reserves the right to change design and specifications without notice. For the latest TDS, please kindly check www.bomeiflor.com

[2] Tests include *Aspergillus Niger*, *Penicillium Pinophilum*, *Ayrebasidium Pullulans*, *Chaetomium Globosum* and *Trichoderma Virens*.

[3] Tests include *Staphylococcus Aureus*, *Klebsiella Pneumoniae* and *Pseudomonas*.

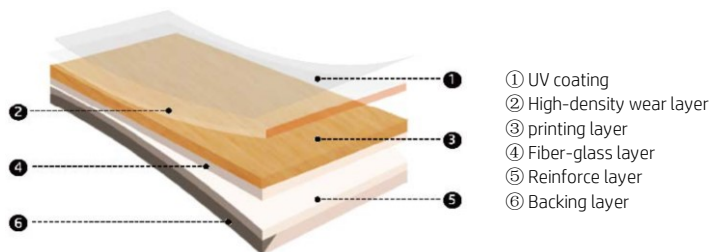

GLOBALFLOR
 Powered By
BOMEIFLOR