

# NATURE 2.0T RPO

Specially for areas where acoustics and wear-resistance and equally import. The collection also offers underfoot comfort.

NATURE 2.0T PRO<sup>[1]</sup>

## DESCRIPTION

Total thickness	EN 428	mm	2.0
Wear layer thickness	EN 429	mm	0.35
Width	EN 426	m	2
Length	EN 427	m	20
Weight	EN 430	g/m <sup>2</sup>	2000

## CLASSIFICATION

European classification	EN 685	Class	24/33
Fire rating	EN 13501-1:2007	Class	B <sub>f1</sub> -s1
Static electrical propensity	EN 1815	kV	<2
Slip resistance	DIN 51130	Class	R9

## PERFORMANCE

Dimension stability	EN 434:1994	%	≤0.1
Castor chair test	EN 425	-	OK
Flexibility	EN 435	-	Excellent
Residual indentation	EN 433	mm	≤0.2
Color fastness	EN ISO 105-B02	Degree	≥6
Stain resistance	EN 423	-	Good
Hygiene	-	-	Does not contribute to infection spreading
Impact sound reduction	EN ISO 717/2	dB	Approx.13
Backing type	-	-	Foam
Surface treatment	-	-	UV

## ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000	µg/m <sup>3</sup>	<10
Formaldehyde Emission	EN 14041	Class	E1
PCP	EN 14041	-	ND


## CUSTOMIZABLE HEALTECH™ TREATMENT

Antimicrobial Activity <sup>[2]</sup>	ASTM G 21-13	Grade	0
Antimicrobial Activity <sup>[3]</sup>	ASTM E 2180-07	%	>99.9

[1] Globalflor has a policy of continuous product and product data improvement, it reserves the right to change design and specifications without notice. For the latest TDS, please kindly check [www.bomeiflor.com](http://www.bomeiflor.com)

[2] Tests include Aspergillus Niger, Penicillium Pinophilum, Ayreobasidium Pullulans, Chaetomium Globosum and Trichoderma Virens.

[3] Tests include Staphylococcus Aureus, Klebsiella Pneumoniae and Pseudomonas.

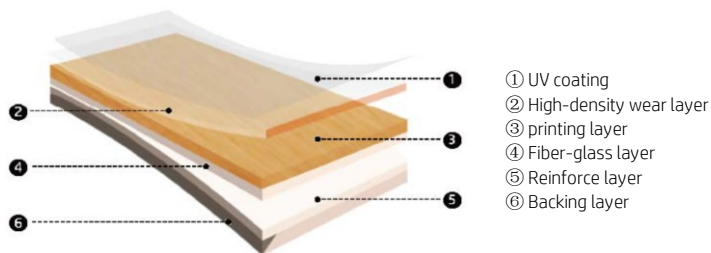

**GLOBALFLOR**  
 Powered By  
**BOMEIFLOR**